
SVIC S720DC


< 30 dB
Leise



HD ready

Display Type	1 x 7" LCD TFT Panel 4/3 Liquid Crystal Display		
Ansi-Lumen	132 2200 Lumen	Screen	44 Lux (bei 200 cm Screen)
Contrast	800:1 full on/off		800:1 full on/off
Black Level	0,1650 min. Lumen		0,055 min. Lumen
Offset	-		
Resolution	-		
Video Modes	NTSC, PAL, SECAM, NTSC 4.43, EDTV, HDTV 1080i, 1080p, 720p, 1080p		
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Very narrow picture width and rooms with very little light.		
Light Source	-		
Light Life	6000 h.		
Operating Costs	-		
Focus	-		
Zoom	-		
Objective	-		
Throw Ratio	-		
Audio	2 x 2W		
Connections	D-sub 15 pin in Scart in YUV in S-Video in Cinch Video in Cinch Stereo in und out Antenne in SD Card Slot		
Ceiling Mounting	-		
Power	-		

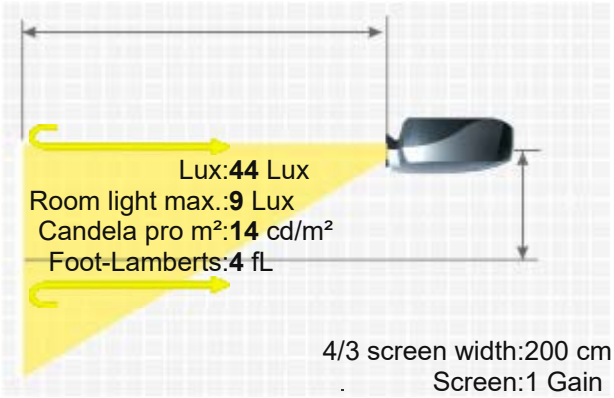

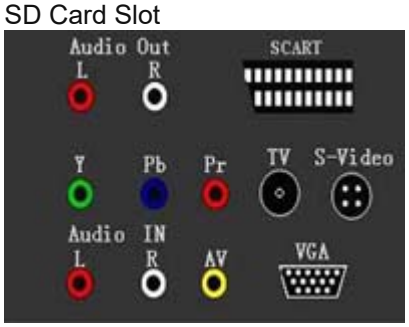

SVIC S720DC

Size WxHxD	-
Operating Noise	28dB
Weight	-
Keystone	Vertical
Illumination	-
Frequenz	-
Foot-Lamberts	4 fL / max. 100 cm screen width 14 cd/m²
Features	■ Full HD 1080P compatible ■ Password protection ■ Faroudja DCDi ■ Digital Zoom ■ De-interlace ■ DVB-T tuner and card reader
Status	- Discontinued (EOL) // Last update of the data: 2024-05-29
Data	
More Details	https://www.projector-database.com/pro/svics720dc-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.