

Telex P1200

TELEX P1200



The Telex model P1200 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 200:1. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. A picture width of up to 289 cm is possible. However, the image should be smaller in room light. We recommend max. 193 cm. It is no longer offered by the manufacturer Telex.

3 x 1,3 LCD TFT Panel
XGA 4/3 Liquid Crystal Display

1100
200:1 full on/off
5,5000 min. Lumen
356 Lux (bei 203 cm Screen)
200:1 full on/off
1.808 min. Lumen

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

PAL, NTSC, Secam

Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Small screen width, rooms with very little ambient light below 100 lumens.

120W UHP Lamp

Articel Nr.: UHP-1

2000 h.

-

Powered

Powered

-

-

-

Cinch Video in
S-Video in
D-sub 15pin in

-

-

-

-

-

Vert.: +/-15°
Hori.: +/-10°

80%

H-sync: 15-100 kHz

V-sync: 43-120 Hz


Range max.: 230 MHz

33 fL / max. 289 cm screen width
113 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

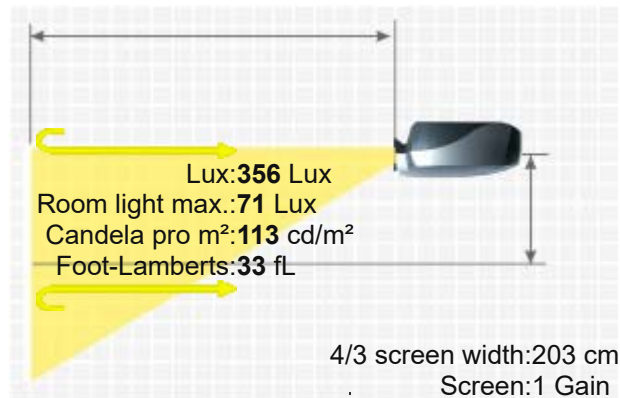

HCinema

<https://www.projector-database.com/pro/telexp1200-en.html>

More Details

