

KRONOS ONE

7" CRT VIDEO PROJECTOR

Beneath the KRONOS ONE's elegant Pininfarina-designed body are a host of leading-edge advancements usually reserved for projectors at twice the price. This unique video projector readily accepts both 720p and 1080i HDTV signals to produce a pristine image that more than rivals your local movie theater. It also accepts a video processor to enhance current NTSC signals. In total, the remarkable KRONOS ONE is for those who truly care about bringing the theater experience into their own home.



vidikron®
THE DIRECTORS' CHOICE

- HDTV compatible High-Scan CRT Video Projector with horizontal scanning frequency of 15-50kHz

- High resolution lenses with bright 7" CRTs and dual focus adjustments

- Adjustable blanking on all four sides with memory for four popular aspect ratios: 4:3 16:9, anamorphic and HD

- Digitally controlled red and blue convergence for perfect color balance

- Personal computer inputs for VGA, SVGA, XGA, SXGA and Macintosh

- Front, rear, ceiling and floor projection modes

- Flawlessly projects to screen sizes from 5' to over 20'

- RGB inputs with horizontal, vertical or composite sync

- Dual-mated power supply

- Keystone compensation for the most demanding installations

- Pininfarina-designed projector chassis



KRONOS ONE 7" CRT PROJECTOR

KRONOS ONE VIDEO PROJECTOR TECHNICAL SPECIFICATIONS

IMAGE SIZES:	60" to 250" (measured diagonally).
PROJECTION CONFIGURATIONS:	Front or rear projection, ceiling or floor mounted.
INPUTS:	1 RGB input with H, V or composite sync for use with a video processor or computer or HDTV decoder.
PROJECTOR TO SCREEN DISTANCE:	Approximately 1.42 times the screen width from front of projector to screen surface, plus 12 inches. Distance varies by vertical position of screen.
RECOMMENDED VIEWING DISTANCES:	Line doubled video or HDTV: 2.5 times height of screen.
VIDEO SYSTEMS STANDARDS:	RGB input with Horiz., Vert. or composite sync.
VIRTUAL HDTV LINE-MULTIPLIED VIDEO:	Compatible with all 31.5kHz (60Hz) and 31.25kHz (50Hz), all multiplied signals up to 50kHz.
HDTV:	Compatible with all applicable HDTV standards with RGB outputs and H, V or composite sync. Adaptable to tri-level sync w/optional transcoder.
COMPUTER DISPLAYS:	VGA, SVGA, XGA, SXGA and Macintosh
SCANNING FREQUENCIES:	Horizontal: 15-50kHz Vertical: 50/120Hz
ON-SCREEN DISPLAY:	Convergence set-up and memory.
ASPECT RATIOS:	16:9, 4:3, Anamorphic and HD. 99 preset memories.
KEYSTONE CORRECTION:	Up to 20 degrees
PROJECTOR DIMENSIONS:	Projector: 22"W x 28"L x 10"H (14"H with ceiling mount brackets) Weight: 99 lbs. Shipping Carton: 28"W x 34.5"L x 21"H Shipping Weight: 132 lbs.
CABINET FINISH:	Light gray
SUPPLIED ACCESSORIES:	Full-function wireless infrared remote control and ceiling mount brackets.

OPTIONAL ACCESSORIES


- Screens: FES, HPX, HGS, PFS, V/TTS and V/PFS Series. Vidikron offers a full selection of screens in many different styles to accommodate all types of applications.

- Ceiling Projector Lifts: CPL 400 and CPL 40S. Allow the projector to be installed inside the ceiling and lowered into operational position at the touch of a switch.

- VSR-2 Automatic Relay: 12V triggered screen relay plugs into projector for automatic screen operation.

- Penta HR and RS-232 Cables: Five wide bandwidth BNC to BNC cables in one easy-to-install sleeve. 22AWG silver-plated solid LGC copper conductor. Ultra low-loss Teflon dielectric insulator. Digital ready.

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

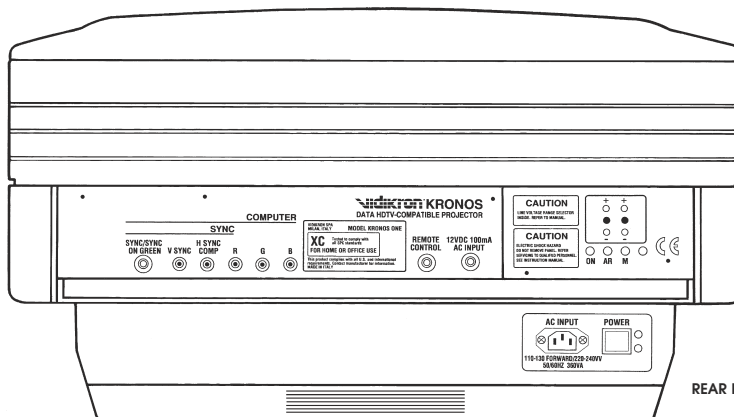

REAR PANEL VIEW



Of America, Inc. • 1413 Chestnut Ave., Hillside, NJ 07205 • 1-800-VIDIKRON • FAX 1-201-938-1917 • www.vidikron.com