


Vidikron Kronos Five



VIDIKRON KRONOS FIVE

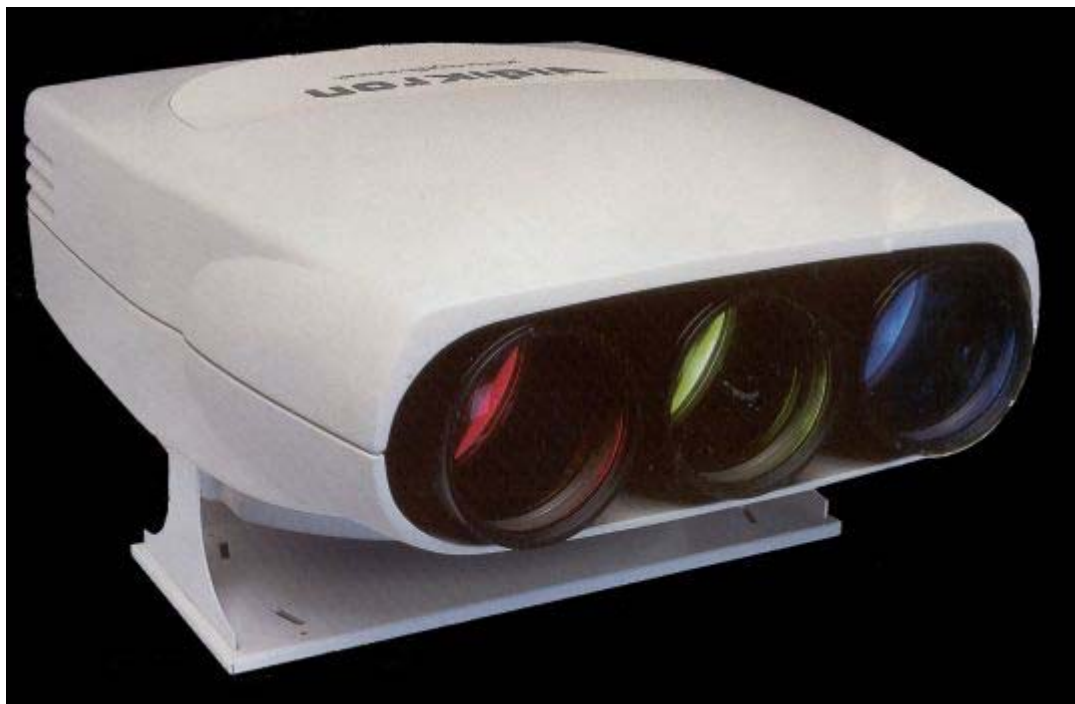

CRT
4/3

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

180 / 800 Lumen

-

-

-

-

-

PAL, NTSC 3,58, NTSC 4,43-System HDTV

CRT Projection | Very narrow picture width and rooms with very little light.

CRT Röhre

ca. 10000 - 20000 h. (je nach Anwendung)

-

Manual

No Zoom

HD6

-

-

S-Video in
1x BNC Video
5 x BNC in
D-sub 15pin in

Yes

-

550 x 380 x 670 mm (21,7"x15"x26,4") 140,03 L/dm³

-

35,00 kg / 77,16 lbs.

-

-

H-sync: 30,0-50,0 kHz
V-sync: 50-120 Hz

6 fL / max. 117 cm screen width
21 cd/m²

60 Lux (bei 200 cm Screen)

-

-

-

-

-

PAL, NTSC 3,58, NTSC 4,43-System HDTV

CRT Projection | Very narrow picture width and rooms with very little light.

CRT Röhre

ca. 10000 - 20000 h. (je nach Anwendung)

-

Manual

No Zoom

HD6

-

-

S-Video in
1x BNC Video
5 x BNC in
D-sub 15pin in

Yes

-

550 x 380 x 670 mm (21,7"x15"x26,4") 140,03 L/dm³

-


35,00 kg / 77,16 lbs.

-

-

H-sync: 30,0-50,0 kHz
V-sync: 50-120 Hz

6 fL / max. 117 cm screen width
21 cd/m²

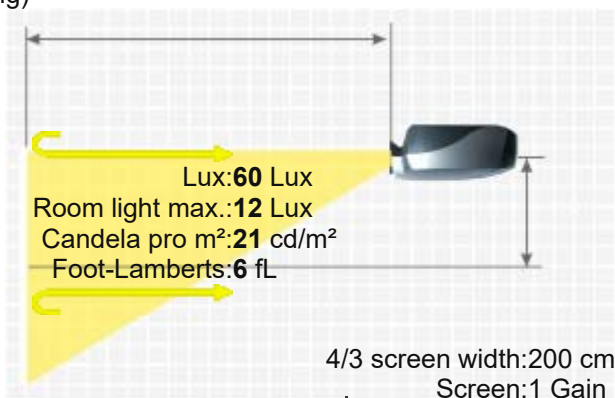

Features

■ Integrated line doubler

■ 4 format memory

In Test

Status

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/vidikronkronusfive-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.