


Vidikron VPF 40HD

VIDIKRON VPF 40HD



Display Type	 7" ESF CRT 4/3 Elektrostatisch Fokussierte Röhre
Ansi-Lumen	Projector 609 700 Peak Lumen Screen 203 Lux (bei 200 cm Screen)
Contrast	-
Black Level	-
Offset	-
Resolution	-
Video Modes	NTSC SECAM PAL HDTV 1080i, 720p
Application	CRT Projection Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	CRT Röhre SD-187
Light Life	ca. 10000 - 20000 h. (je nach Anwendung)
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	-
Throw Ratio	-
Audio	-
Connections	5 x BNC RGBHV in
Ceiling Mounting	Yes
Power	-
Size WxHxD	-
Operating Noise	-
Weight	-
Keystone	-
Illumination	-
Frequenz	H-sync: 15-54 kHz V-sync: 45-120 Hz Range max.: 50 MHz
Foot-Lamberts	19 fL / max. 215 cm screen width 65 cd/m²
Features	■ analogue convergence
In Test	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04

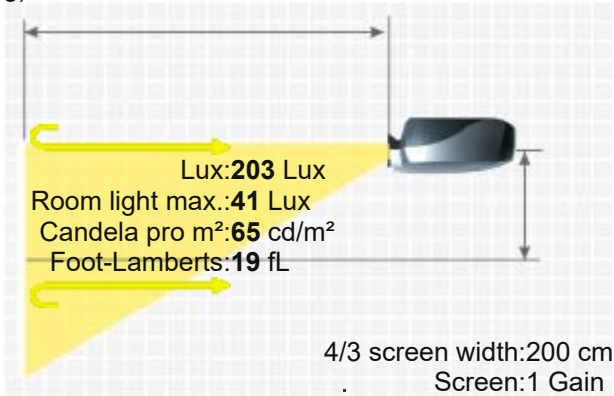

Data



More Details



HCinema

<https://www.projector-database.com/pro/vidikronvpf40hd-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.