


Vidikron VPF 40SE/L



VIDIKRON VPF 40SE/L

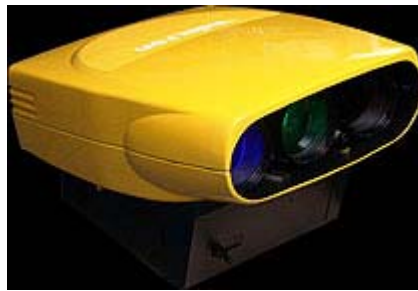

Display Type



7" ESF CRT
4/3 Elektrostatisch Fokussierte Röhre

Ansi-Lumen

200

67 Lux (bei 200 cm Screen)

Contrast

-

-

Black Level

-

-

Offset

-

Resolution

-

Video Modes

NTSC SECAM PAL

Application

CRT Projection | Very narrow picture width and rooms with very little light.

Light Source

CRT Röhre

Light Life

ca. 10000 - 20000 h. (je nach Anwendung)

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

Tac 4

Throw Ratio

-

Audio

2 x 10W

Connections

2 x Video mit stereo audio
S-Video
D-sub 15pin
Variable stereo audio line level out
12V Trigger

Ceiling Mounting

Yes

Power

-

Size WxHxD

560 x 225 x 725 mm (22"x8,9"x28,5") 91,35 L/dm³

Operating Noise

-

Weight

30,90 kg / 68,12 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15,6-16 kHz
V-sync: 50-60 Hz
Range max.: 7,5 MHz

Foot-Lamberts

6 fL / max. 123 cm screen width
21 cd/m²

Features

■ Case designed by Ferrari, analogue convergence
■ hybrid lenses with 3 elements (VPF 40 SE)
■ 6 elements (VPD 40 SEL).

In Test

-


Please note

Gewicht: (40 SE) 35,5 kg (40 SEL)

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

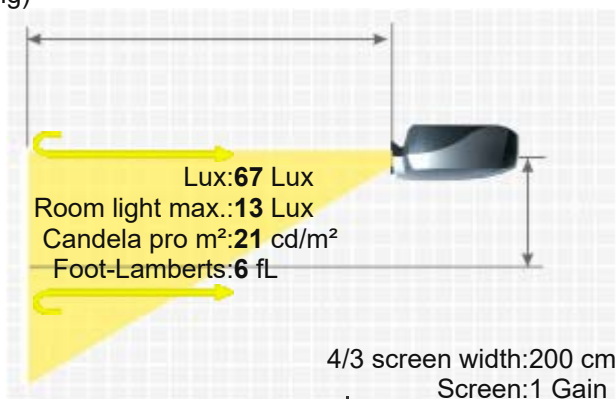



More Details

HCinema

<https://www.projector-database.com/pro/vidikronvpf40se-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.