

Viewsonic P JL802+



V I E W S O N I C P J L 8 0 2 +



Brief Introduction

Beta 2.5

Manufacturer Viewsonic offers the P JL802+, a standard portable LCD projector with SVGA 800 x 600 resolution and a contrast of 200:1. The brightness of 650 ANSI lumens makes it possible to achieve a picture width of 222 cm. In a well-lit room, the image should not be wider than 148 cm. It was launched in 1977 >1977<>

Display Type

3 x 0,9" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

650

217 Lux (bei 200 cm Screen)

Contrast

200:1 full on/off

200:1 full on/off

Black Level

3,2500 min. Lumen

1.101 min. Lumen

Offset

SVGA 800 x 600

Resolution

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

PAL, PAL-M, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W UHP Lamp

Articel Nr.: RLU802+

Light Life

1100 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

F=2,5-3,7 f=32-48 mm

Throw Ratio

1,75-2,62:1

Audio

1,5W

Connections

D-sub 15pin in
2 x Cinch Stereo in
Mini Jack in und out
Cinch Video in
S-Video in
RS232C

Ceiling Mounting

-

Power

260W

Size WxHxD

240 x 151 x 325 mm (9,4"x5,9"x12,8") 11,78 L/dm³

Operating Noise

-

Weight

5,80 kg / 12,79 lbs.

Keystone


-

Illumination

-

Frequenz

-

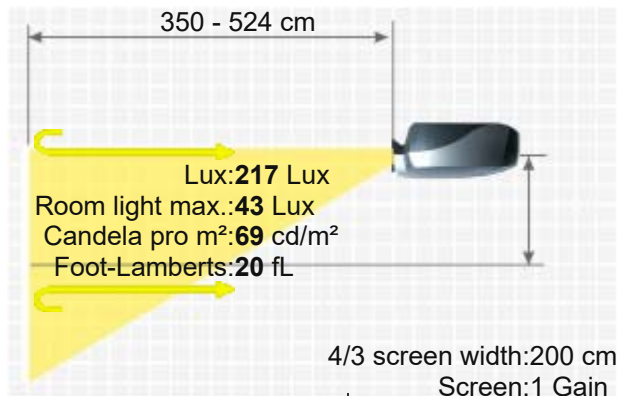

Foot-Lamberts 20 fL / max. 222 cm screen width

69 cd/m²

Features ■ PC Card Slot: PCMCIA

Status 1977 >1977

Data

More Details



HCinema

<https://www.projector-database.com/pro/viewsonicpjl802plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.