


Vicom Sirius E7



VICOM SIRIUS E7

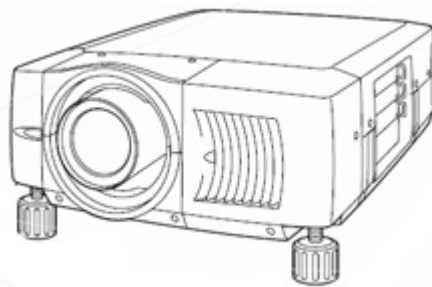

Brief Introduction

Beta 2.5

A brief introduction to the Sirius E7: The Vicom stationary LCD projector offers 5800 Ansi lumens, a contrast of 700:1 and an SXGA 1280 x 1024 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 645 cm is possible as the projector has 5800 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 430 cm. It was launched in 2003 and is no longer offered by the manufacturer Vicom, but is still very popular in our projector database.

3 x 1,8" LCD TFT Panel mit MLA
SXGA 5/4 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

5800 / 2900 im singel lamp mode
700:1 full on/off
8,2857 min. Lumen

Vert.: +/-40% (LNS S02 V=+/-50%)

SXGA 1280 x 1024

1.310.720 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, NTSC4.43, PAL-M/N

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

2 x 200W Lamp

Articel Nr.: POA-LMP39

1000 h.

-

Powered

Powered 1,3

-

2,0-2,6:1

3W Stereo

1 x DVI

1 x Audio RCA x 2

Computer 2 / Video

5 x BNC / YUV

1 x Audio RCA x 2

1 x BNC Video/YC

1 x S-Video

1 x Audioaus. Eingang RCA x 2

1 x USB

Control Port x 2

RS232C


Yes

550W

439 x 230 x 605,8 mm (17,3"x9,1"x23,9") 61,09 L/dm³

45dB

20,50 kg / 45,19 lbs.

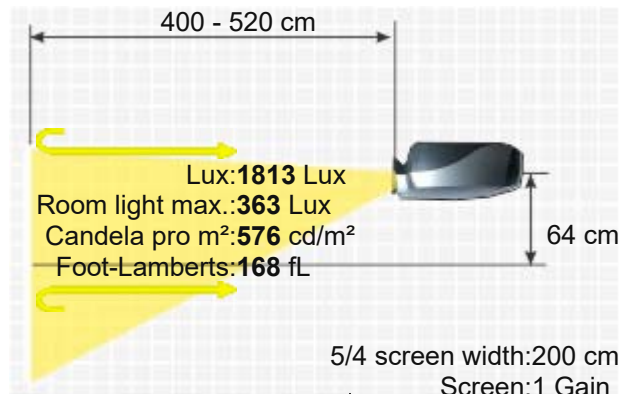

Keystone

90%

Illumination

168 fL / max. 645 cm screen width

Frequenz

576 cd/m²

Foot-Lamberts

168 fL / max. 645 cm screen width

576 cd/m²

■ Lens shift Funktion (LNS S02 V=+/-50%)

■ Freeze

■ Kensington Slot

■ Gamma correction

■ Remote control with laser pointer

■ Optional LAN network compatible.

■ Digital Zoom

■ RJ45 connection board optionally available

■ Faroudja DCDi optionally available

■ 10-bit digital gamma correction

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W06	1.2-1.5:1	2.4-3 m	+/-40%		Powered
LNS-W04	1.54-2.03:1	3.1-4.1 m	+/-40%		Powered
LNS-W02Z	1.4-1.8:1	2.8-3.6 m	+/-40%		Powered
LNS-T03	6.2-9.1:1	12.4-18.2 m	+/-40%		Powered
LNS-S03	2.6-3.5:1	5.2-7 m	+/-40%		Powered
LNS-S02Z	2-2.6:1	4-5.2 m	+/-50%		Powered
LNS-M01Z	3.5-4.5:1	7-9 m	+/-40%		Powered
LNS-T02	4.4-6.2:1	8.8-12.4 m	+/-40%		Powered
Fix Optional Lenses					
LNS-W03	0.8:1	1.6 m	0.0% Fix		No Zoom
LNS-W01Z	1.2:1	2.4 m	+/-40%		No Zoom
LNS-T01Z	7:1	14 m	+/-40%		No Zoom

Status

2003 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details

HCinema

<https://www.projector-database.com/pro/vikomsiriuse7-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.