

Vivitek D507



VIVITEK D507



Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen Contrast Black Level Offset

2600
3000:1 full on/off
0,8667 min. Lumen
867 Lux (bei 200 cm Screen)
3000:1 full on/off
0,289 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source Light Life

Medium screen width or rooms with little light, max. 100 lumens.
180W Lamp
3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,11

Objective

F=2,52-2,73 f=24,34-25,95 mm

Throw Ratio

2,18-2,32:1

Audio

2W Mono

Connections

D-sub 15 pin in und out
S-Video in
Cinch Video in
Mini Jack Audio in und out
RS232C

Ceiling Mounting Power

Yes
230 / 205W in Eco Mode

Size WxHxD

261 x 78 x 190 mm (10,3"x3,1"x7,5") 3,87 L/dm³

Operating Noise

31 / 28 dB in Eco Mode

Weight

1,90 kg / 4,19 lbs.

Keystone

Vert.: +/-30°

Illumination

85%

Frequenz


H-sync: 15,30-90 kHz
V-sync: 43-85 Hz

Foot-Lamberts

81 fL / max. 444 cm screen width
278 cd/m²

Features

- Eco Mode
- Kensington Slot

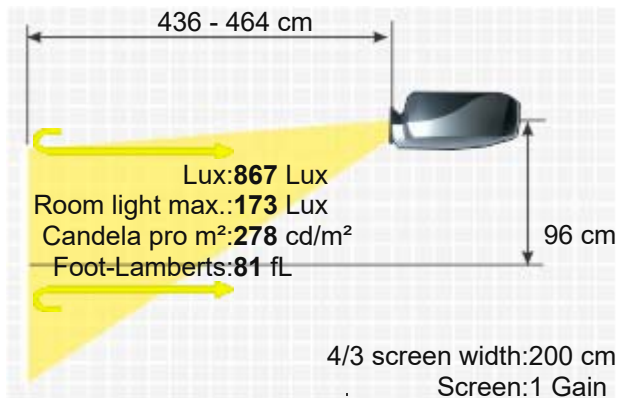

More Details



HCinema

<https://www.projector-database.com/pro/vivitek507-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.