

Vivitek D6510

VIVITEK D6510



A brief introduction to the Vivitek D6510. The stationary DLP projector has an XGA 1024 x 768 resolution and a contrast of 3000:1. Includes a lens shift and keystone correction function, which provides freedom during installation. A picture width of up to 702 cm is possible, if the picture width is smaller (we recommend max. 468 cm), rooms with residual light are also no problem. Video signals 1080P are also no problem for the projector. This model is no longer offered by Vivitek.



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector
6500
3000:1 full on/off
2,1667 min. Lumen

Screen
2167 Lux (bei 200 cm Screen)
3000:1 full on/off
0,723 min. Lumen

Vert.: +50% -0% Hori.: +/-10%
XGA 1024 x 768

786.432 Pixel
UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

280W Lamp

Articel Nr.: 5811100818-S

2000 h. 3000 h. in eco Mode

5,49% / 0,18 €

Powered

Powered 1,32

F=1,7-1,9 f=26-34 mm

1,78-2,35:1

2 x 3W

DVI in
D-sub 15 pin in und out
5 x BNC RGBHV in
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
RS232C Din 9 pin
RJ45 in



USB



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
710 / 580W in Eco Mode
508 x 195 x 389 mm (20"x7,7"x15,3") 38,53 L/dm³
39 / 34 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz

17,00 kg / 37,48 lbs.
Vert.: +/-40°
Hori.: +/-35°
85%
H-sync: 15-90 kHz
V-sync: 50-85 Hz

Foot-Lamberts

201 fL / max. 702 cm screen width
689 cd/m²


Features

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- BrilliantColor™
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable

Optional

- Osram bulb only NLMP19231
- Lamp ruby Ruby-LMP19231
- Lamp original 5811100818-S
- Compatible lamp LMP-K19230
- Object lens original 5811116070-SVK
- Object lens original 5811116071-SVK
- Remote control original 5041841300
- Ceiling Mount 220 Halterung45

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n20202>

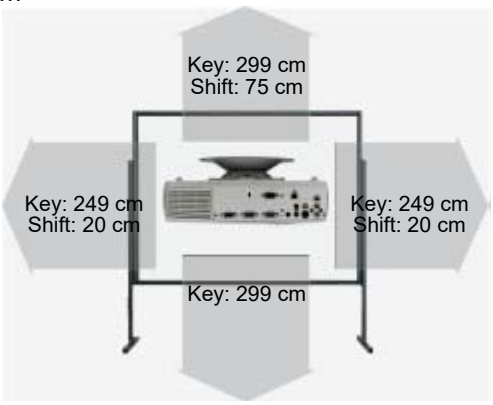

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
GB957G	4.43-8.3:1	8.9-16.6 m	50%	+/-10%	Powered
5811116071-SVK	2.22-4.43:1	4.4-8.9 m	50%	+/-10%	Powered
5811100987-SVK	4.3-8.3:1	8.6-16.6 m	50%	+/-10%	Powered
5811100984-SVK	1.78-2.35:1	3.6-4.7 m	50%	+/-10%	Powered
5811100982-SVK	1.33-1.79:1	2.7-3.6 m	50%	+/-10%	Powered
Fix Optional Lenses					
5811116070-SVK	0.77:1	1.5 m	0.0% Fix		No Zoom

Status 2010 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/vivitek6510-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.