


Vivitek LX1138L

VIVITEK LX1138L



A brief introduction to the LX1138L: The Vivitek 3D DLP projector offers 6000 Ansi lumens, a contrast of 10000:1 and an XGA 1024 x 768 resolution. The integrated lens shift gives freedom when positioning the projector. The projector will be able to illuminate an image width of 675 cm well. Rooms with residual light can be created by the projector with a smaller image width, we recommend a maximum of 450 cm here. A smartphone with an MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz image mirroring (screen mirroring). Even 1080P video signals and 3D are no problem for the projector. On the market since 2016, the model is no longer offered by the manufacturer Vivitek.

 1 x 0,7" DDP4421 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector 6000
10000:1 full on/off
0,6000 min. Lumen
Vert.: +74,7% --62,3%
XGA 1024 x 768
786.432 Pixel
WUXGA 1920 x 1200 compressed
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)
Standard-Portabel | External training and company presentations, as well as product presentations.
Very large screen width and rooms with plenty of light and shaded daylight.
370W Lamp
Articel Nr.: 5811119760-SVV
1500 h. 3500 h. in eco Mode
-

Screen 2000 Lux (bei 200 cm Screen)
10000:1 full on/off
0,2 min. Lumen

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Standard-Portabel | External training and company presentations, as well as product presentations.

Very large screen width and rooms with plenty of light and shaded daylight.

370W Lamp

Articel Nr.: 5811119760-SVV

1500 h. 3500 h. in eco Mode

-

Manual


Manual 1,7

F=2,45-3,22 f=18,8-32 mm

1,3-2,21:1

2 x 7W

2 x HDMI 1.4b mit mHL in
DVI-D in
5 x BNC RGBHV in
D-sub 15pin in und out
Cinch Video in

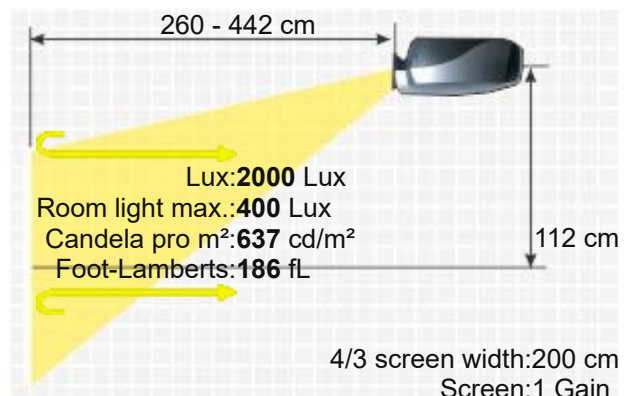

Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ A,B in
RS232C Din 9 pin in
RJ45 in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
530W
445 x 143 x 330 mm (17,5"x5,6"x13") 21 L/dm³
-

Weight
Keystone
Illumination

6,80 kg / 13,23 lbs.
Vert.: +/-30°
Hori.: +/-25°
90%

Frequenz

H-sync: 15,31-91,4 kHz
V-sync: 47-120 Hz

Foot-Lamberts

186 fL / max. 675 cm screen width
637 cd/m²


Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Lan network compatible.
- 6-segment RGBCYW colour wheel.

Status

2016 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2016-12-22 13:58:11

Data

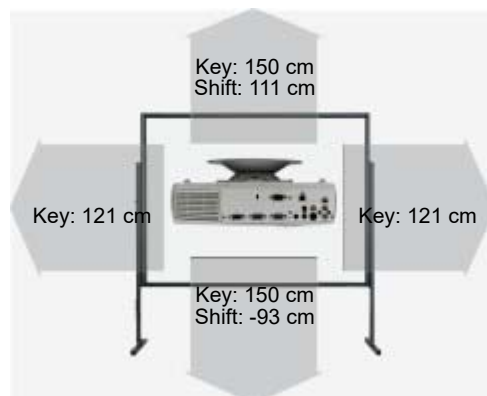

More Details



HCinema

<https://www.projector-database.com/pro/vivitek1138L-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.