

Zenith Pro 895X



Display Type



7" ESF CRT
HDTV 16/9 Elektrostatisch Fokussierte Röhre

Ansi-Lumen

Projector

696 800 Peaker Lumen

Screen

309 Lux (bei 200 cm Screen)

Contrast

-

Black Level

-

Offset

-

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

NTSC, PAL, SECAM

Application

CRT Projection | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

CRT Röhre

Light Life

ca. 10000 - 20000 h. (je nach Anwendung)

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,03 Hybrid

Throw Ratio

-

Audio

-

Connections

S-Video in

5 x BNC in

1 x Video über BNC in

D-sub 15pin in

RS232C

Ceiling Mounting

Yes

Power

400W

Size WxHxD

-

Operating Noise

-

Weight

-

Keystone

-

Illumination

-

Frequenz

H-sync: 15-50 kHz

V-sync: 40-100 Hz

Range max.: 37,5 MHz

Foot-Lamberts

29 fL / max. 268 cm screen width

99 cd/m²

■ Overscan adjustable

■ Chamber filter

■ Gammer correction


■ Automatic timer on or off

■ digital convergence also via remote control

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

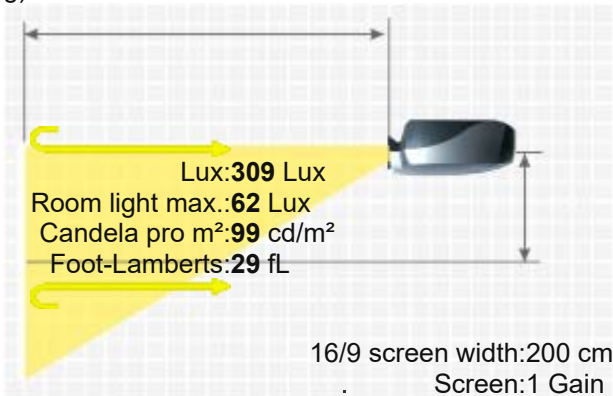



HCinema

<https://www.projector-database.com/pro/zenithpro895x-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.