

Sharp XG V10XE/U

SHARP XG V10XE/U



Brief Introduction

Beta 2.5

The Sharp model XG V10XE/U is an LCD projector with XGA 1024 x 768 resolution and a contrast of 400:1. The built-in lens shift and keystone correction function provides freedom when setting up. The projector can illuminate images up to 551 cm wide thanks to its 4000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 367 cm is recommended. The projector was launched in 2003 and is no longer sold by the manufacturer.

Display Type

3 x 1,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

4000

1294 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

10,0000 min. Lumen

3.26 min. Lumen

Lens shift

Vert.: +50% -0%

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, 480i/480P/720P/1080i

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

2 x 200W UHP Lamp

Articel Nr.: CLMPF0064CE01

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

2 x 3W Stereo

Cinch Video in

7 x Stereo Eingang

2 x D-sub 15pin in

VGA Ausgang

3 x S Video Eingang


RS232C Controuler per VGA

DVI Eingang

5 x BNC Eingang für ein RGBHV Signal

2 x YUV über BNC Eingang

weitere optional

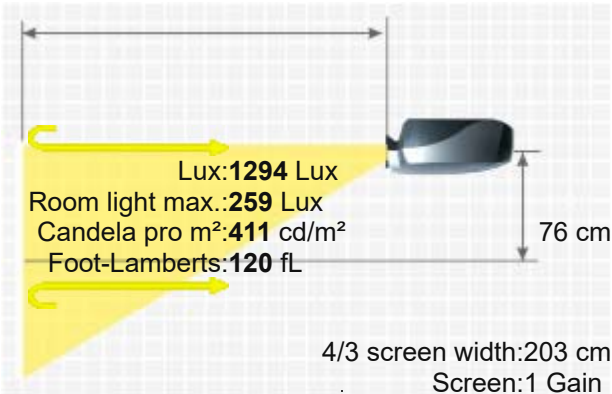

Ceiling Mounting Yes
Power 575W
Size WxHxD 444,2 x 196,2 x 621,3 mm (17,5"x7,7"x24,5") 54,04 L/dm³
Operating Noise 39dB

Weight 18,90 kg / 41,67 lbs.
Keystone Vert.: +/-30°
Illumination -
Frequenz H-sync: 15-126 kHz
V-sync: 43-200 Hz
Range max.: 230 MHz
Foot-Lamberts 120 fL / max. 551 cm screen width
411 cd/m²

- Features
- Lens shift Funktion
 - Freeze
 - User logo
 - Eco Mode
 - Gamma correction
 - Digital image shift
 - Picture-in-Picture
 - Password protection
 - Remote control with laser pointer und mouse control
 - Digital zoom 8x
 - 3:2 pull down deinterlacer
 - 10-bit digital gamma correction

Optional

Lamp ruby	Ruby-LMP3698
Bulb only original	CLMPF0064CE01
Lamp original	BQC-XGV10WU/1
Universal Remote original	Fernb-uni-V3
Air filter original	PFILD0110CEZZ

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d3700>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Sharp AN-LV80EZ	4.03-5.68:1	8.2-11.5 m	50%		Powered
Sharp AN-LV55EZ	2.77-3.94:1	5.6-8 m	50%		Powered
Sharp AN-LV40EZ	2.06-2.68:1	4.2-5.4 m	59.5-9.5%		Powered
Sharp AN-LV36EZ	1.82-2.91:1	3.7-5.9 m	50%		Powered
Sharp AN-LV26EZ	1.33-1.52:1	2.7-3.1 m	50%		Powered
Fix Optional Lenses					
Sharp AN-S07	0.7:1	1.4 m	0.0% Fix		No Zoom
Sharp AN-LV18MZ	0.9:1	1.8 m	5%		No Zoom
Sharp AN-LV140X	6.76:1	13.7 m	50%		No Zoom

Status 2003 Discontinued (EOL) // Last update of the data: 2023-08-04



