ACTO LX326




3LCD

Brief Introduction Beta 2.5	A brief introduction to the LX326: The ACTO LCD projector offers 3300 Ansi lumens, a contrast of 3500:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. The projector can illuminate an image width of up to 500 cm well thanks to its 3300 Ansi lumens. In room lighting, however, the image width should ideally be less than 333 cm. It was launched in 2012 and is no longer offered by the manufacturer ACTO.
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	3300	1100 Lux (bei 200 cm Screen)
Contrast	3500:1 full on/off	3500:1 full on/off
Black Level	0,9429 min. Lumen	0,315 min. Lumen

Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	215W UHP Lamp
Light Life	4000 h. 6000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,58-1,75 f=18,85-22,63 mm
Throw Ratio	1,47-1,77:1
Audio	-
Connections	HDMI in D-sub 15pin in und out Cinch Video in Cinch Stereo in S-Video in Mini Jack Audio in und out
Ceiling Mounting	Yes
Power	280W
Size WxHxD	340 x 86,8 x 242 mm (13,4"x3,4"x9,5") 7,08 L/dm³
Operating Noise	36 / 32 dB in Eco Mode

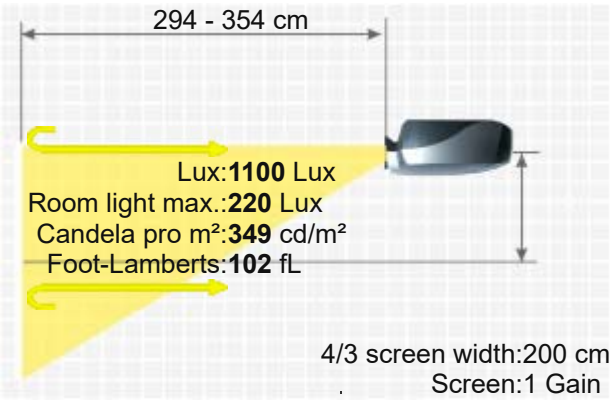

Weight	3,05 kg / 6,72 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 48-85 Hz
Foot-Lamberts	102 fL / max. 500 cm screen width 349 cd/m²

ACTO LX326

Features	■ Eco Mode
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema
https://www.projector-database.com/pro/actolx326-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.