

Anders + Kern X80U



ANDERS + KERN X80U



Brief Introduction

Beta 2.5

The Anders + Kern X80U LCD projector has 1500 Ansi lumens, a contrast of 350:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 337 cm well. However, if room light is available, the image width should ideally not exceed 225 cm. The model built in 2001 is no longer offered by Anders + Kern, but is still a very popular projector.

3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

1500

Contrast

350:1 full on/off

Black Level

4,2857 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, Composite Video, S-Video, DVD-Komponenten

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W SHP Lamp

Articel Nr.: VLT-PX1LP

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,31

Objective

F=1,8-2,0 f=36-47 mm

Throw Ratio

1,97-2,57:1

Audio

1W Mono

Connections

D-sub 15pin in und out

S-Video in

Cinch Video in

Cinch Stereo in

USB in

RS232C Din 8 pin

Ceiling Mounting

Yes

Power

210W

Size WxHxD

242 x 79 x 294 mm (9,5"x3,1"x11,6") 5,62 L/dm³

Operating Noise

36dB

Weight

3,50 kg / 7,72 lbs.

Keystone

Vertical

Illumination

85%

Frequenz


H-sync: 15-92 kHz

V-sync: 50-85 Hz

Range max.: 160 MHz

Foot-Lamberts

46 fL / max. 337 cm screen width

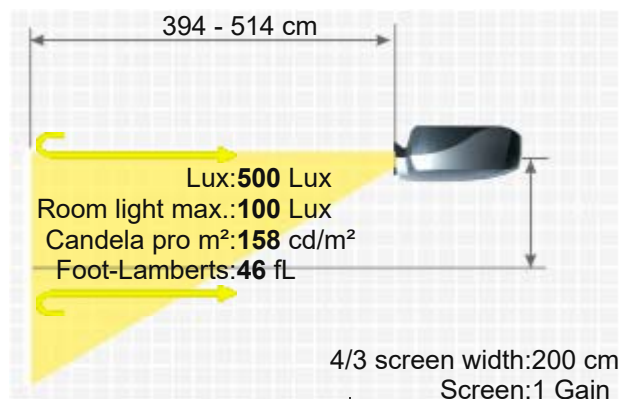

158 cd/m²

- Freeze
- Kensington Slot
- sRGB
- Picture-in-Picture
- New Natural Colour Matrix
- Linedoubler
- Digital Zoom

Features

Status
Data

2001 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/akx80u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.