

Eiki EIP SXG20

EIKI EIP SXG20



The stationary EIP SXG20 BrilliantColor DLP projector from Eiki has 7500 Ansi lumens, a contrast of 7500:1 and an SXGA+ 1400 x 1050 resolution. With the lens shift function, the projector can be positioned very freely. The projector can illuminate images up to 754 cm wide thanks to its 7500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 503 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Even 1080P video signals are no problem for the projector. It was launched in 2009 and is no longer offered by the manufacturer Eiki, but is still very popular in our projector database.



1 x 0,95" DLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Projector 7500 / 6375 im Eco Mode

7500:1

1,0000 min. Lumen

Vert.: +/-55% Hori.: +/-45%

SXGA+ 1400 x 1050

1.470.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

2 x 330W UHP Lamp

Articel Nr.: 610 343 5336 / LMP130

2000 h. 2500 h. in Eco Mode

-

Powered

Powered

optional

optional

2 x 3W Stereo

DVI-D mit HDCP in

HDMI 1.3b in

5 x BNC RGBHV in

RJ45 in

RS232C Din 9pin in


USB Typ B

Yes

Screen 2500 Lux (bei 200 cm Screen)

7500:1

0,333 min. Lumen

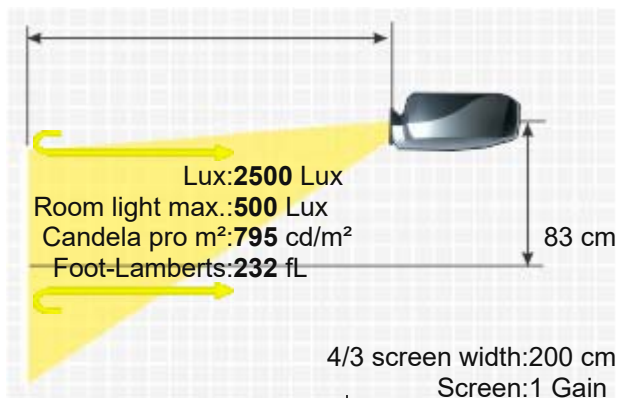

Power 848W
Size WxHxD 400 x 242,5 x 522,5 mm (15,7"x9,5"x20,6") 50,53 L/dm³
Operating Noise 36dB

Weight 19,80 kg / 43,65 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination 90%
Frequenz H-sync: 15-120 kHz
V-sync: 48-120 Hz
Range max.: 230 MHz
Foot-Lamberts 232 fL / max. 754 cm screen width
795 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- 24/7 continuous operation capable
- Edge Blending
- Picture-in-Picture
- BrilliantColor™
- Remote control with backlight
- Control via web browser
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Digital Zoom
- DICOM Simulation

Optional	Philips bulb only	NLMP18943
	Lamp ruby	Ruby-LMP18943
	Lamp original	610-343-5336 / LMP130 / ET-SLMP130
	Compatible lamp	LMP-K18943
	Object lens original	ET-SW52 / LNS-W52
	Object lens original	ET-ST51 / LNS-T51
	Object lens original	ET-ST50 / LNS-T50
	Air filter compatible	Alternative zu:ET-SFYL131 / POA-FIL-131 / 610-334-3747 / 003-001726-01
	Remote control original	6451024619 / CXZZ
	Air filter original	ET-SFYL131 / POA-FIL-131 / 610-334-3747 / 003-001726-01
	Ceiling Mount 220	Halterung45


Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19455>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W51	1.2-1.5:1	2.4-3 m	+/-55%	+/-45%	Powered
LNS-W50	1.5-1.8:1	3-3.6 m	+/-55%	+/-45%	Powered
LNS-T51	4.8-8:1	9.6-16 m	+/-55%	+/-45%	Powered
LNS-T50	2.8-5:1	5.6-10 m	+/-55%	+/-45%	Powered
LNS-S50	1.8-2.8:1	3.6-5.6 m	+/-55%	+/-45%	

Fix Optional Lenses					
LNS-W52	0.8:1	1.6 m	0.0% Fix		No Zoom

Status 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

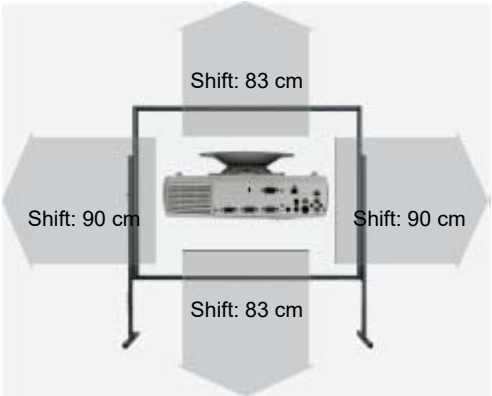



HCinema

<https://www.projector-database.com/pro/eikieipsxg20-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.