

Eiki LC HDT1000

EIKI LC HDT1000



A brief introduction to the LC HDT1000: The Eiki large-format LCD projector offers 10000 Ansi lumens, a contrast of 3000:1 and HD2K 2048 x 1080 resolution. The integrated lens shift gives you freedom when positioning the projector. 10000 Ansi lumens ensure that a picture width of 871 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 581 cm. In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Even 1080P playback is no problem for the projector. The projector was launched in 2011 and is no longer sold by the manufacturer, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type



3 x 1,64" LCD TFT Panel
HD2K 4/3 Liquid Crystal Display

Ansi-Lumen

10000 / 5000 im singel Lamp Mode 3333 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off 3000:1 full on/off

Black Level

3,3333 min. Lumen 1,112 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10%

Resolution

HD2K 2048 x 1080
2.211.840 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 380W NSHA Lamp
Articel Nr.: 610 351 5939

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

No

Connections

HDMI 1.3 in
DVI-D mit HDCP in
D-sub 15 pin in
5 x BNC RGBHV in
S-Video in
RJ45 in
USB Typ B
RS232C Din 9 pin in
weitere optional

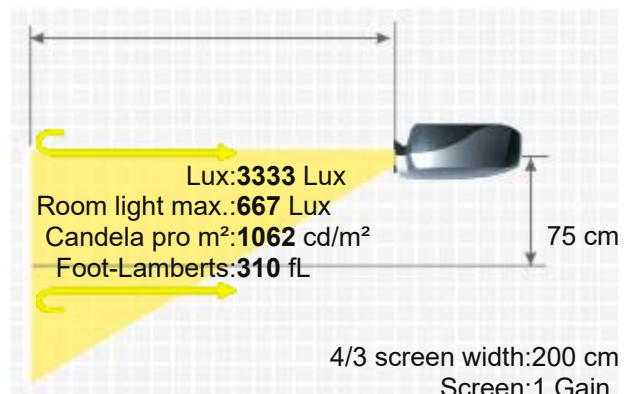

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes

955 / 770W in Eco Mode

538,5 x 268 x 757 mm (21,2"x10,6"x29,8") 109,15 L/dm³

43 / 39 dB in Eco Mode

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

27,60 kg / 60,85 lbs.

Vert.: +/-30°
Hori.: +/-30°

90%
H-sync: 15-120 kHz
V-sync: 48-120 Hz
Range max.: 230 MHz

310 fL / max. 871 cm screen width
1062 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Digital image shift
- Edge Blending
- Picture-in-Picture
- PJLink™
- Lan network compatible.
- Digital Zoom
- and Picture-in-Picture

Features

Optional

Air filter original

Object lens original

Object lens original

Object lens original

Object lens original

Lamp original

POA-FIL-180 / 610-335-9830 / ET-SFYL180

ET-SW07 / LNS-W07

ET-SW05 / LNS-W05

ET-SS04 / LNS-S04

ET-SM02 / LNS-M02

610-351-5939 / LMP146 / ET-SLMP146



Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi20113>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W06	1.2-1.5:1	2.4-3 m	+/-50%	+/-12.5%	Powered
LNS-W05	1.31-1.84:1	2.6-3.7 m	+/-50%	+/-12.5%	Powered
LNS-W04	1.5-2:1	3-4 m	+/-50%	+/-12.5%	Powered
LNS-W02Z	1.4-1.8:1	2.8-3.6 m	+/-50%	+/-12.5%	Powered
LNS-T03	6.3-9:1	12.6-18 m	+/-50%	+/-12.5%	Powered
LNS-T02	4.4-6.2:1	8.8-12.4 m	+/-50%	+/-12.5%	Powered
LNS-S04	2-2.6:1	4-5.2 m	+/-50%	+/-12.5%	
LNS-S03	2.6-3.5:1	5.2-7 m	+/-50%	+/-12.5%	Powered
LNS-S02Z	2.79-3.64:1	5.6-7.3 m	+/-80%	+/-12.5%	Powered
LNS-M02	3.5-4.5:1	7-9 m	+/-50%		Powered
LNS-M01Z	4.8-6.2:1	9.6-12.4 m	+/-80%	+/-12.5%	Powered
Fix Optional Lenses					
LNS-W07	0.8:1	1.6 m	0.0% Fix		No Zoom
LNS-W03	1.1:1	2.2 m	0.0% Fix		No Zoom
LNS-W01Z	1.24:1	2.5 m	+/-50%	+/-12.5%	No Zoom
LNS-T01Z	6.9:1	13.8 m	+/-50%	+/-12.5%	No Zoom

Status

2011 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

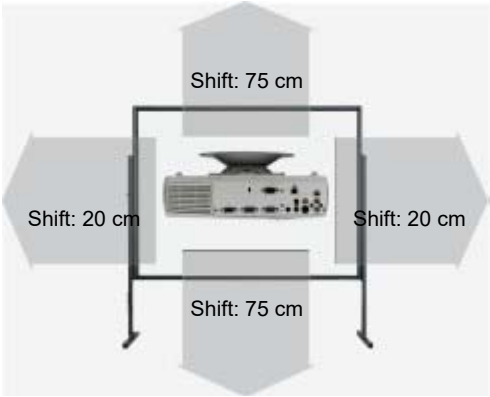



HCinema

<https://www.projector-database.com/pro/eikilchdt1000-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.