

Enthronic E950M

Brief Introduction Beta 2.5	The standard portable E950M LCD projector from Enthronic has 2500 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 2500 Ansi lumens, an image width of 435 cm is possible. In room light, the picture should be max. 290 cm wide. This model is no longer offered by Enthronic.
Display Type	3 x 0,9" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	2500
Projector: Contrast	400:1 full on/off
Projector: Black Level	6,2500 min. Lumen
Screen	809 Lux (bei 203 cm Screen) 400:1 full on/off 2.038 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	HDTV,480p,720p,1080i,NTSC / NTSC4.43 / PAL / PAL-M / PAL-N / SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W UHL Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	F=1,7 f=38-49 mm
Throw Ratio	2,08-2,68:1
Audio	-
Connections	S-Video & Composite Video
Ceiling Mounting	-
Power	210W standby: 15W
Size WxHxD	-
Operating Noise	38dB
Weight	-
Keystone	Vert.: +/-15°
Illumination	90%
Frequenz	H-sync: 15,6-91 kHz V-sync: 50-85 Hz
Foot-Lamberts	75 fL / max. 435 cm screen width 257 cd/m²
Features	3:2 pull down
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04

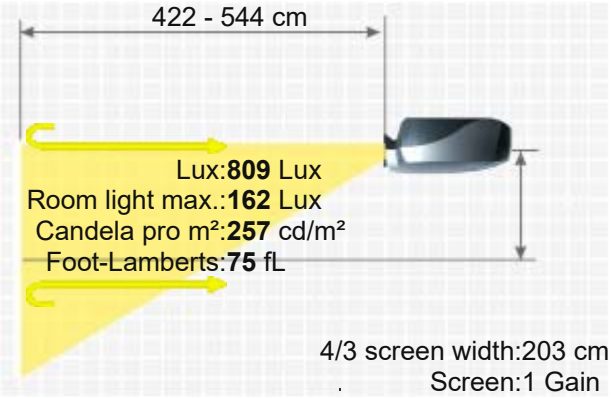

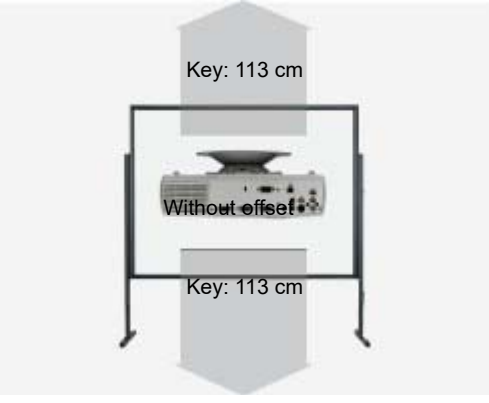

More Details

https://www.projector-database.com/pro/enthronice950m-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

ENTHRONIC E950M