

Epson EB-L1515S

EPSON EB-L1515S



A brief introduction to the Epson EB-L1515S. The large-screen LCD laser projector has an SXGA+ 1400 x 1050 resolution and a contrast of 2500000:1. The manufacturer states a laser life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 954 cm is possible as the projector has 12000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 636 cm is recommended. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. It is also Full HD 1080P compatible. Even projection onto the ceiling is possible thanks to the 360° projection. On the market since 2017, the model is no longer offered by the manufacturer Epson.



3 x 1,06" C2 Fine LCD TFT Panel
SXGA 4/3 Liquid Crystal Display

Projector

12000

2500000:1

0,0048 min. Lumen

Vert.: +/-55% Hori.: +/-19%

SXGA+ 1400 x 1050

1.470.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laser

Article Nr.: ELPAP51 / V13H134A51

20000 h.

Screen

4000 Lux (bei 200 cm Screen)

2500000:1

0,002 min. Lumen

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

0,00 € Laser

Powered


Powered 1,62

optional

optional

-

HDMI mit HDCP 2.2 in
DVI-D in
D-sub 15pin in und out
5 x BNC RGBHV in
Mini Jack Audio in und out
SDI 3G in
RS232C Din 9 pin in

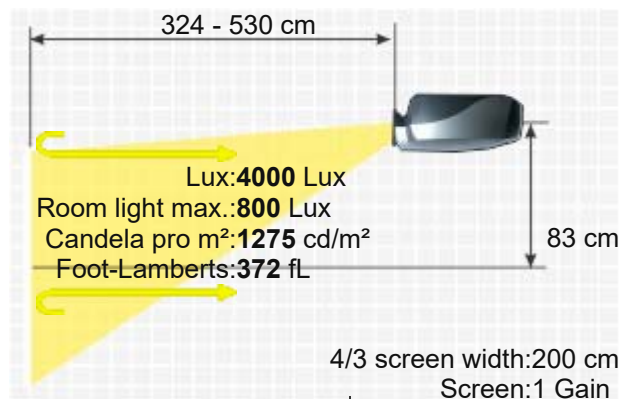

RJ45 in
RJ45 mit HDBaseT in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
1024W / 647W in Eco Mode
586 x 185 x 492 mm (23,1"x7,3"x19,4") 53,34 L/dm³
40 / 32 dB in Eco Mode

Weight
Keystone
Illumination

24,00 kg / 52,91 lbs.
Vert.: +/-45°
Hori.: +/-30°
-


Frequenz

-

Foot-Lamberts

372 fL / max. 954 cm screen width
1275 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- User logo
- Eco Mode
- Kensington Slot
- sRGB
- Warping
- 360° installable
- Edge Blending
- Password protection
- Lan network compatible.
- Crestron®-Software compatible.
- DICOM Simulation
- AMX
- Extron

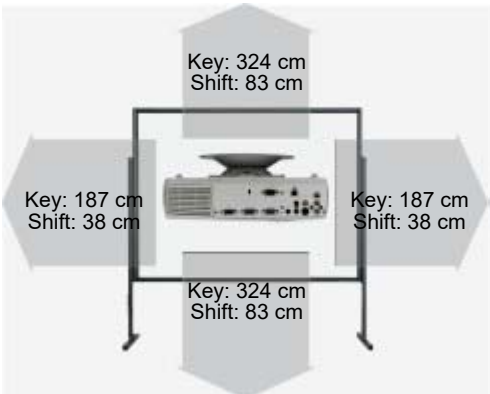

Features

Optionaler Zubehör

	Objektiv Original	ELPLL08 / V12H004L08	3.397,61 €
	Objektiv Original	V12H004M09 / ELPLM09	EOL €
	Objektiv Original	V12H004U03 / ELPLU03	EOL €
	Objektiv Original	V12H004W05 / ELPLW05	1.940,84 €
	Objektiv Original	V12H004M0A / ELPLM10	1.940,84 €
	Objektiv Original	V12H004M0B / ELPLM11	1.940,84 €
	Dokumentkamera Original	ELPDC21 / V12H758040	599,37 €
	Objektiv Original	ELPLW06 / V12H004W06	3.175,98 €
	Objektiv Original	ELPLU04 / V12H004U04	4.398,32 €
	Objektiv Original	V12H004UA3 / ELPLU03S	4.730,05 €
	Objektiv Original	V12H004L08 / NELPLL08	3.397,61 €
	Luftfilter Kompatibel	Alternative zu:ELPAF51 / V13H134A51	41,95 €
	Fernbedienung Original	2173310	53,78 €

	Luftfilter Original	ELPAF51 / V3BH134A51	105,02 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELPLW06	1.19-1.63:1	2.4-3.3 m	+/-60%	+/-18%	Powered
ELPLW05	1.19-1.63:1	2.4-3.3 m	+/-24%	+/-10%	Powered
ELPLU04	0.64-0.78:1	1.3-1.6 m	+/-60%	+/-18%	Powered
ELPLU03	0.48-0.57:1	1-1.1 m	+/-24%	+/-10%	Powered
ELPLM11	3.54-5.41:1	7.1-10.8 m	+/-60%	+/-18%	Powered
ELPLM10	2.43-3.71:1	4.9-7.4 m	+/-60%	+/-18%	Powered
ELPLM09	1.58-2.56:1	3.2-5.1 m	+/-60%	+/-18%	Powered
ELPLL08	5.28-7.72:1	10.6-15.4 m	+/-60%	+/-18%	Powered

Status

2017 Discontinued (EOL) // Last update of the data: 2024-11-08
Created: 2018-02-26 18:00:28



More Details



HCinema

<https://www.projector-database.com/pro/epsonebl1515s-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.