

Knoll Systems HDP2100



Brief Introduction

Beta 2.5

A brief introduction to the HDP2100: The Knoll Systems DLP projector offers 1800 Ansi lumens, a contrast of 4000:1 and HDTV 1920 x 1080 resolution. The projector can illuminate an image width of up to 431 cm thanks to its 1800 Ansi lumens. In room light, however, the picture width should ideally be less than 287 cm. It was launched in 2010 and is no longer offered by the manufacturer Knoll Systems.



1 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector

1800

4000:1 full on/off

0,4500 min. Lumen

-

HDTV 1920 x 1080

2.073.600 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

280W Lamp

2000 h. 3000 h. in Eco Mode

-

Manual

Manual 1,2

-

1,6-1,92:1

Nein


2 x HDMI 1.3b in
D-sub 15 pin in
YUV in
S-Video in
Cinch Video in
RS232C
Mini Jack Audio in und out
12V Trigger out

Screen

800 Lux (bei 200 cm Screen)

4000:1 full on/off

0,2 min. Lumen

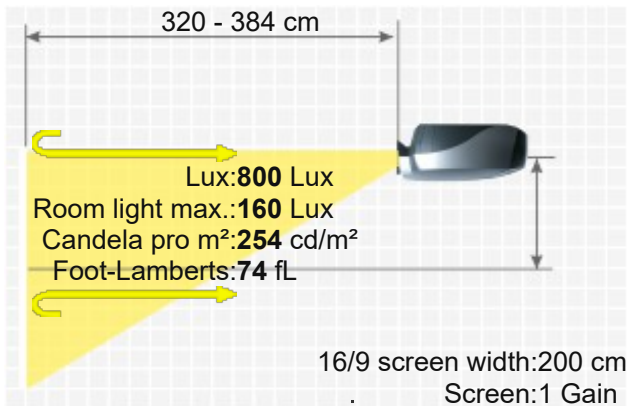



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
320W
335 x 102 x 254 mm (13,2"x4"x10") 8,68 L/dm³
33 / 28 dB in Eco Mode

Weight
Keystone
Illumination

3,40 kg / 7,5 lbs.
Vert.: +/-15°
85%

Frequenz

-

Foot-Lamberts


74 fL / max. 431 cm screen width
254 cd/m²

Features

- Eco Mode
- Kensington Slot
- 6-segment, 4-speed colour wheel

Screen Mirroring

-

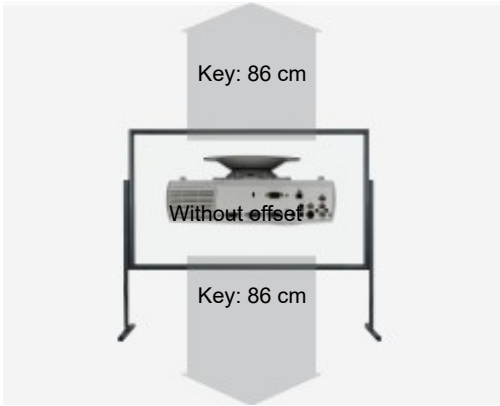

Optional accessories



Deckenhalterung Länge 100-120 mm Halterung120 47,86 €

Status 2010 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/knollsystemshdp2100-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.