

Optoma EzPro / EP757

OPTOMA EZPRO / EP757



Brief Introduction

Beta 2.5

Display Type



1 x 0,7" 12° DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2300

744 Lux (bei 203 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,1500 min. Lumen

0.373 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

Full NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM und HDTV (480i/p, 576i/p, 720p, 1080i)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

250W UHP Lamp

Articel Nr.: SP.86501.001 /

SP.L1501.001

Light Life

2000 h.

Operating Costs

23,81% / 0,1 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,44-2,69 f=28,8-34,5 mm

Throw Ratio

2,0-2,4:1

Audio

2 x 3W

Connections

1 x 15-Pin D-Sub in 1 x out

1 x DVI-I in

1 x Audio Mini Jack (für 15-pin D-SUB)


1 x Audio Mini Jack (für DVI)

1 x RS232,

1 x S-Video

1 x Cinch Video,

1 x L/R RCA Audio Input,

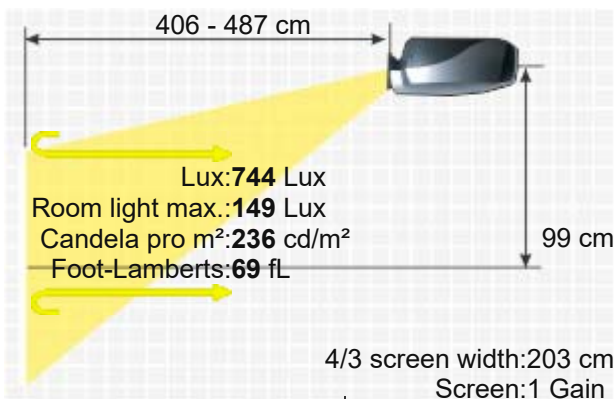

Ceiling Mounting
Power
Size WxHxD
Operating Noise

1 x Mini Din Audio out
1 x Remote Maus port
Yes
320W standby 2W
277 x 85 x 225 mm (10,9"x3,3"x8,9") 5,3 L/dm³
32dB

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

2,90 kg / 6,39 lbs.
Vert.: +/-16°
90%
H-sync: 15-100 kHz
V-sync: 43-120 Hz
Range max.: 140 MHz
69 fL / max. 418 cm screen width
236 cd/m²

Features

- Freeze
- Kensington Slot
- Remote control with laser pointer und mouse control
- Digital Zoom
- Silicon Image De-interlacer

Optional

Osram bulb only	NLMP15521
Lamp ruby	Ruby-LMP15521
Lamp original	BL-FU250A / SP.86501.001
Universal Remote original	Fernb-uni-V3

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n2637>
2003 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/optomaep757-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.