

Premier PJ X701



P R E M I E R P J X 7 0 1



Brief Introduction

Beta 2.5

The standard portable PJ X701 LCD projector from Premier has 1600 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. An image width of up to 348 cm is possible as the projector has 1600 Ansi lumens. However, if room light is available, the picture should be max. 232 cm wide. This model is no longer offered by Premier. It should also be noted that there are unfortunately no longer any replacement lamps available for this projector, neither originals nor replicas.

Display Type

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

1600

533 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

3,2000 min. Lumen

1,072 min. Lumen

Offset

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC,
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

180W UHE Lamp
Articel Nr.: LMP15653

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

f=21,5-28 mm

Throw Ratio

1,45-1,93:1

Audio

2 x 1W

Connections

D-sub 15pin in und out
YUV in
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack

Ceiling Mounting

Yes

Power

240W

Size WxHxD

280 x 80 x 225 mm (11"x3,1"x8,9") 5,04 L/dm³

Operating Noise

35dB

Weight


3,00 kg / 6,61 lbs.

Keystone

Vert.: +/-15°

Illumination

85%

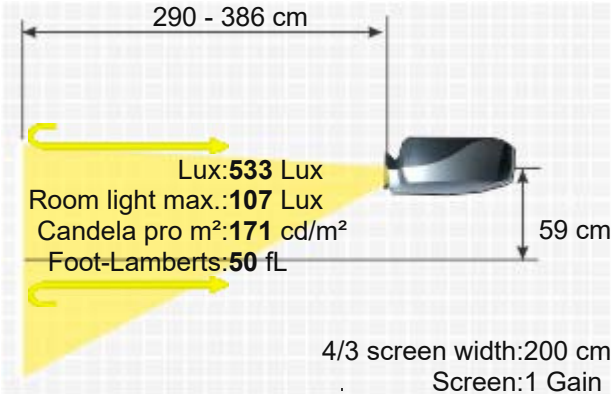

Frequenz -

Foot-Lamberts 50 fL / max. 348 cm screen width

171 cd/m²

Features

- Freeze
- Picture-in-Picture

Status Data 2004 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/premierpjax701-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.