

Premier PJ X903



P R E M I E R P J X 9 0 3



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

The Standard-Portabel Premier PJ X903 LCD projector has 3500 Ansi lumens, a contrast of 600:1 and an XGA 1024 x 768 resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours every day. The horizontal and vertical keystone correction provides leeway when setting up. An image width of up to 515 cm is possible as the projector has 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. The model built in 2005 is no longer offered by Premier.



3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

3500
600:1 full on/off
5,8333 min. Lumen

Screen

1167 Lux (bei 200 cm Screen)
600:1 full on/off
1,955 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

250W VIP Lamp

4000 h.

-

Manual

Manual 1,3

f=37,8-49,2 mm

2,07-2,69:1

1 x 2W

DVI in
S-Video in
Cinch Video in

Yes

320W

285 x 86 x 210 mm (11,2"x3,4"x8,3") 5,15 L/dm³

35dB

2,60 kg / 5,73 lbs.

Vert.: +/-15°

Hori.: +/-10°

85%

H-sync: 35-79,9 kHz



V-sync: 56-85 Hz

Range max.: 157 MHz

108 fL / max. 515 cm screen width

370 cd/m²

-

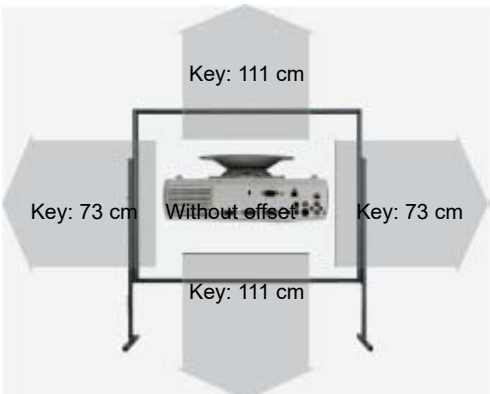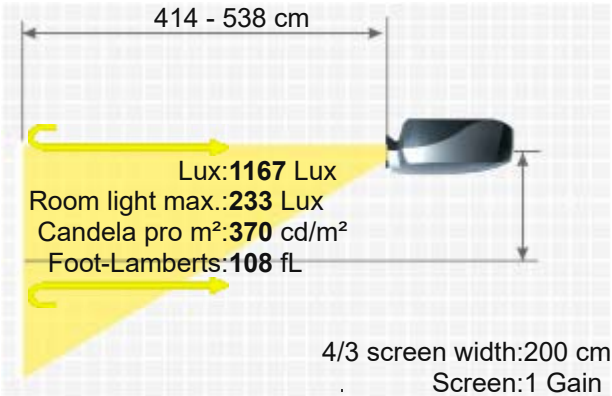

More Details



HCinema

<https://www.projector-database.com/pro/premierpjax903-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.