

proxima®

Own your audience.



ULTRALIGHT SV1+

the affordable ultraportable

AFFORDABLE IMPRESSIONS

remarkably low, breakthrough price for cost-conscious presenters

LOW COST OF OWNERSHIP

4,000-hour lamp lasts ten years*, saving costs and hassles

ZOOM IN

1.3:1 zoom lets you set up anywhere in the room

BRILLIANT IMAGES

700 ANSI lumens for lights-on presentations

WIDE COMPATIBILITY

high bandwidth for security today and tomorrow



PROXIMA ULTRALIGHT® SV1+ FEATURES

Still using an overhead projector to make your most important presentations? Now is the time to harness the power of a multimedia projector. Proxima's UltraLight SV1+ is a lightweight, 8.1-pound projector featuring SVGA resolution and a manual zoom and focus. At a remarkably low, breakthrough price, the UltraLight SV1+ makes it possible for presenters of all levels to fit a projector into their budget.

- new breakthrough price makes the cost of owning a projector more affordable than ever
- a lightweight 8.1 pounds makes it easy to take your dynamic presentations with you
- 1.3:1 zoom lens gives you the flexibility to set up anywhere in the room
- 700 ANSI lumens of brightness let you present in well-lit environments
- handy carrying case and easy-to-use remote control offer the essentials a traveling presenter needs at no extra cost

* Lamp life is based on usage of 8 hours a week. Individual lamp life may materially vary.

WHAT'S INCLUDED

MODEL SV1+ INCLUDES:

- Power cord
- Product documentation
- Computer cable, AV cable
- Soft carrying case
- Lens cap
- Remote control with laser pointer and mouse control
- USB mouse cable


[Presentation solutions]

SV1+ TECHNICAL SPECIFICATIONS

Display Technology	• 0.9 in. polysilicon LCD x 3
Resolution	• SVGA (800 X 600)
Resolution Supported	• VGA (640 x 480) • SVGA (800 x 600) • XGA (1024 x 768) • Mac (640 x 480 - 1152 x 870)
Number of Colors	• 16.7 million colors
Brightness	• 700 ANSI lumens
Contrast Ratio	• 300:1 (full-on, full-off)
Computer Compatibility	• IBM PC or compatibles • Apple Macintosh
Video Compatibility	• S-Video, composite video, NTSC 3.58, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, MESECAM
Input Sources	• 1 computer, 1 video, 1 S-video, 1 computer audio, 1 video audio
Output Sources	• 1 monitor out, 1 audio line out
H-Sync Range	• 15-100 kHz
V-Sync Range	• 43-130 Hz
Bandwidth	• 140 MHz
Aspect Ratio	• 4:3
Image Size (Diagonal)	• 1.8 ft. to 20.8 ft. (0.5 m to 6.3 m)
Projection Lens	• Manual zoom and focus, 1.3:1 zoom ratio • Focal length: 38 mm to 55 mm, f/1.8-2.1
Digital Zoom	• 16x magnification
Projection Distance	• 3.6 ft. to 32.8 ft. (1.1 m to 10 m)
Keystone Correction	• 10°
Projection Method	• front/rear, desktop/ceiling
Lamp (Life)	• 120 watt UHP (4,000 hours)
Audio	• 2 x 1 w stereo
Remote Control	• Projector and mouse control with laser pointer
Dimensions	• 9.5 in. W x 13.6 in. L x 3.9 in. H 24.2 cm W x 34.7 cm L x 9.9 cm H
Weight	• 8.1 lbs. (3.7 kg)
Power Consumption	• <180 watts
Power Requirements	• 90V-250V at 47/63 Hz (+/- 10%)
Operating Temperature (Sea Level)	• 50°- 90° F (10°- 35° C)
On-Screen Menu Languages	• English, German, French, Spanish, Portuguese
Audible Noise	• 38db
Approvals	• FCC Class A, UL, C-UL, CE
Warranty	• Two years on parts and labor (excluding lamp)

UltraLight SV1+ Set Up

Position the UltraLight SV1+ anywhere in the room.

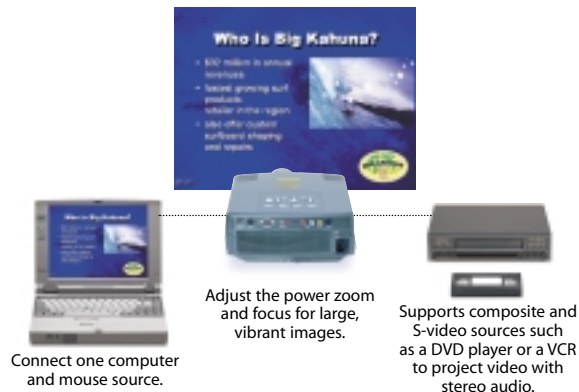

ORDERING INFORMATION

Model Number	
SV1+	For worldwide use
Optional Accessories	
CASE-001	Rolling soft case
CASE-002	Compact rolling soft case
CASE-102	Deluxe rolling hard case (checkable/shippable)
CASE-103	Compact rolling hard case (checkable/shippable)
A650	50 in. portable tabletop screen
LAMP-013	120-watt UHP lamp
Contact Your Dealer	S-video cable, Mac adapter, PC speaker cable, computer audio cable

SV1+ PROJECTION DISTANCES / IMAGE SIZES

Projection Distance		Image Size (Diagonal)			
		Minimum		Maximum	
3.6'	1.1 m	1.8'	0.5 m	2.3'	0.7 m
6.6'	2.0 m	3.3'	1.0 m	4.2'	1.3 m
13.1'	4.0 m	6.7'	2.0 m	8.3'	2.5 m
19.7'	6.0 m	10'	3.0 m	12.5'	3.8 m
26.2'	8.0 m	13.3'	4.1 m	16.7'	5.1 m
32.8'	10.0 m	16.7'	5.1 m	20.8'	6.3 m

MOBILE/ULTRALIGHT

PRESENTATION SOLUTIONS

proxima®

www.proxima.com
1.888.PROXIMA

UltraLight Projectors

ULTRALIGHT SV1+

proxima®
Own your audience.

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298
(858) 457-5500, FAX (858) 457-9647, (800) 447-7692 (U.S. and Canada)

European Office: K.G. Meldahlsvei 9, Postboks 1403
N-1602 Fredrikstad, Norway, [tel] +47 69 34 01 55, [fax] +47 69 34 06 32

www.proxima.com

Proxima and Proxima UltraLight are registered trademarks of Proxima Corporation.
Other trademarks are the property of their respective owners. ©2000 Proxima Corporation.
All rights reserved. Specifications are subject to change without notice.
7/00 709-00798-2 UltraLight SV1+ Data Sheet.qxd