

Ricoh PJ WXL6280

RICOH PJ WXL6280



The Ricoh model PJ WXL6280 is a DLP laser projector with WXGA 1280 x 800 resolution and a contrast of 100000:1. It is a laser projector with 20000 hours of light life, which is over 13.7 years with four hours of use per day. The projector also offers a lens shift function for flexible projection adjustment without loss of quality. An image width of up to 787 cm is possible, if the image width is smaller (we recommend max. 525 cm), rooms with residual light are also no problem. This model is no longer offered by Ricoh.



1 x 0,65" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

6000

2400 Lux (bei 200 cm Screen)

Contrast

100000:1 full on/off

100000:1 full on/off

Black Level

0,0600 min. Lumen

0,024 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-15%

Resolution

WXGA 1280 x 800

1.024.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laser

Light Life

20000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

Nein

Connections

HDMI in
DVI-D in
D-sub 15pin in und out
YUV in
USB Typ A in
RS232C Din 9 pin in
RJ45 in

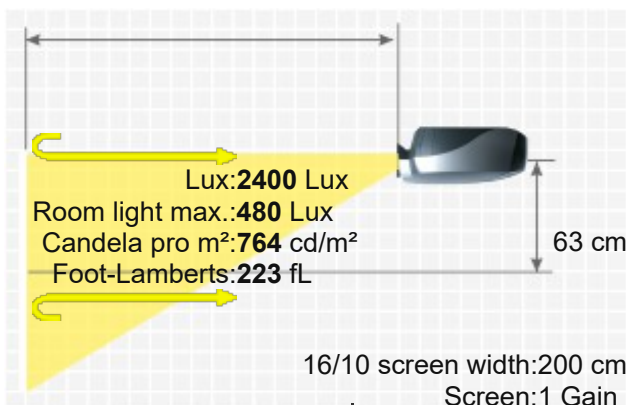


Ceiling Mounting
Power
Size WxHxD
Operating Noise

HDBaseT in
Yes, is possible.
540 / 260W in Eco Mode
484 x 185 x 509 mm (19,1"x7,3"x20") 45,58 L/dm³
35 / 33 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts
Features
Screen Mirroring

18,00 kg / 39,68 lbs.
Vert.: +/-20°
-
H-sync: 15-91,1 kHz
V-sync: 24-85 Hz
223 fL / max. 787 cm screen width
764 cd/m²
■ Lens shift Funktion
■ Eco Mode
■ Picture-in-Picture
■ PJLink™
■ Lan network compatible.
-

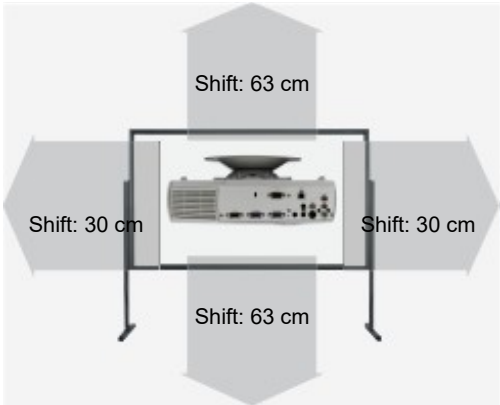

Optional accessories

 Deckenhalterung Länge 225 mm
Halterung45
85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Part # 512918	3.04-5.78:1	6.1-11.6 m	+/-50%	+/-15%	Powered
Part # 512917	1.6-3.07:1	3.2-6.1 m	+/-50%	+/-15%	Powered
Part # 512916	1.28-1.61:1	2.6-3.2 m	+/-50%	+/-15%	Powered
Part # 512915	1-1.28:1	2-2.6 m	+/-50%	+/-15%	Powered
Part # 512914	0.97-1:1	1.9-2 m	+/-50%	+/-15%	Powered

Status
2016 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2016-03-22 12:28:06

Data


More Details



HCinema

<https://www.projector-database.com/pro/ricohpjexl6280-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.