

Runco VX 2cx

RUNCO VX 2CX



Brief Introduction

Beta 2.5

The Runco VX 2cx DLP projector has 2500 Ansi-Lumen, a contrast of 3100:1 and a HDTV 1280 x 720 pixel resolution. The built-in lens shift function provides freedom when adjusting the projection. An image width of up to 508 cm is possible, as the projector has 2500 Ansi lumens. However, if room light is available, the image should be max. 339 cm wide. This model is no longer offered by Runco, but is still a very popular projector. It should also be noted that there are unfortunately no longer any replacement lamps available for this projector, neither originals nor replicas.



3 x 0,8" HD2 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

2500

Contrast

3100:1 full on/off

Black Level

0,8065 min. Lumen

Lens shift

Vert.: +60% -24% Hori.: +/-16% motorisch max.

Resolution

HDTV 1280x720 Pixel
921.600 Pixel

Video Modes

HDTV 720p, 1080i, EDTV 480p,

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

275W UHP Lamp

Light Life

Articel Nr.: 151-1033-00
2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

1 x DVI
12V Trigger

Ceiling Mounting

Ja

Power


510W

Size WxHxD

487,20 x 206,40 x 672 mm (19,2"x8,1"x26,5") 67,42 L/dm³

Operating Noise

-

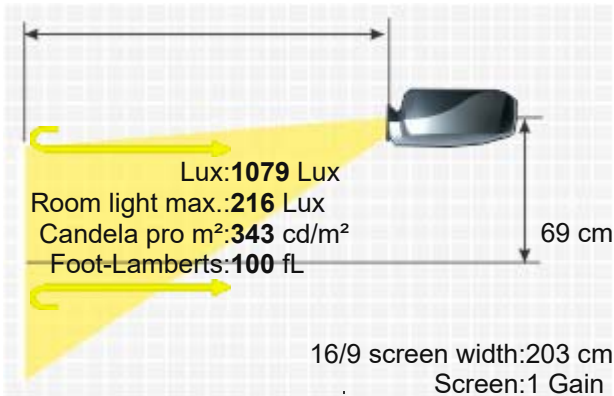


Weight 36,00 kg / 79,37 lbs.
Keystone -
Illumination -

Frequenz H-sync: 15-100 kHz
V-sync: 28-78 Hz

Foot-Lamberts 100 fL / max. 508 cm screen width
343 cd/m²

- Features
- Lens shift Funktion motorisch max.
 - Gamma correction
 - Remote control with backlight
 - Overscan adjustable
 - External video processor included.

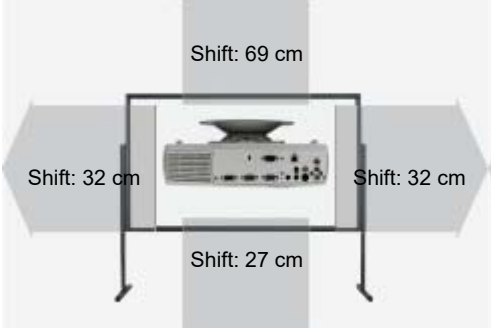

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Runco Proteus F	3.63-5.72:1	7.4-11.6 m	60-24%	+/-16%	Powered
Runco Proteus E	2.42-3.57:1	4.9-7.2 m	60-24%	+/-16%	Powered
Runco Proteus D	1.82-2.39:1	3.7-4.9 m	60-24%	+/-16%	Powered
Runco Proteus C	1.45-1.76:1	2.9-3.6 m	60-24%	+/-13%	Powered
Runco Proteus B	1.22-1.44:1	2.5-2.9 m	60-24%	+/-10%	Powered

Fix Optional Lenses

Runco Proteus A	0.64:1	1.3 m	0.0% Fix	No Zoom	
-----------------	--------	-------	----------	---------	--

Status 2004 Discontinued (EOL) // Last update of the data: 2023-10-26

Data



More Details



HCinema

<https://www.projector-database.com/pro/runcovx2c-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.